

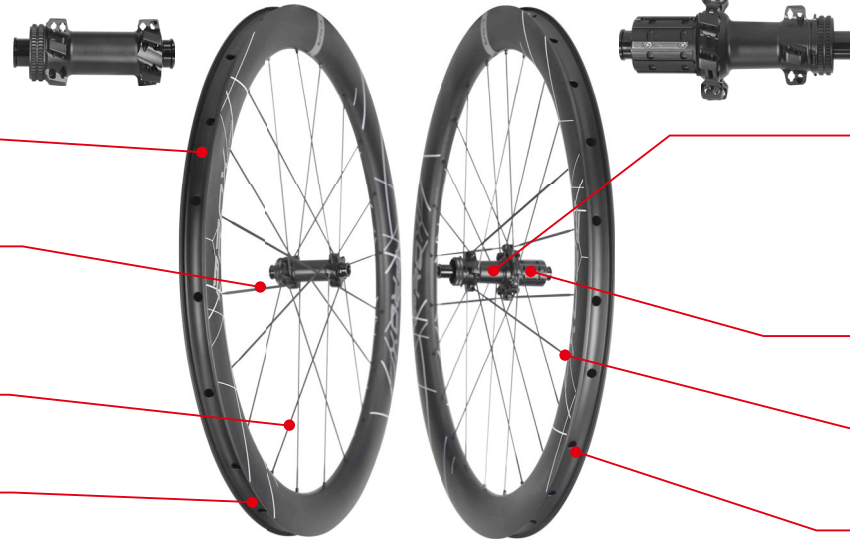
NEW

23.5mm Inner Width

**Front: 20H (1:1 Ratio)
Rear: 24H (2:1 Ratio)**

**Full Carbon Spoke Width:
3.2mm
5.2mm**

Tubeless Ready



**ProX C69DB Hubs Ceramic Bearings
54T Ratchet Freehub System**

**Freehub Body Options:
Shimano HG 11/12s
SRAM XDR
Shimano Micro Spline Road (MSR)
Campagnolo N3W**

Titanium Nipples

Compatible For 700*30C-50C Tire

ProX Ultra Light C69DB Ratchet System Full Carbon Spoke Wheels (With Titanium Nipples)

Model	C69DB-RD923-35UL	C69DB-RD923-45UL	C69DB-RD923-50UL	C69DB-RD923-55UL	C69DB-RD923-60UL	C69DB-RD923-65UL	C69DB-RD923-85UL
Rim Drawing							
Rim Depth	35mm	45mm	50mm	55mm	60mm	65mm	85mm
Rim Width	30mm Outer (23.5mm Inner)	30mm Outer (23.5mm Inner)	30mm Outer (23.5mm Inner)	30mm Outer (23.5mm Inner)	30mm Outer (23.5mm Inner)	30mm Outer (23.5mm Inner)	30mm Outer (23.5mm Inner)
Tire Type	Tubeless or Clincher	Tubeless or Clincher	Tubeless or Clincher	Tubeless or Clincher	Tubeless or Clincher	Tubeless or Clincher	Tubeless or Clincher
Hub	ProX C69DB	ProX C69DB	ProX C69DB	ProX C69DB	ProX C69DB	ProX C69DB	ProX C69DB
Front Size	12*100mm Thru-Axle	12*100mm Thru-Axle	12*100mm Thru-Axle	12*100mm Thru-Axle	12*100mm Thru-Axle	12*100mm Thru-Axle	12*100mm Thru-Axle
Rear Size	12*142mm Thru-Axle	12*142mm Thru-Axle	12*142mm Thru-Axle	12*142mm Thru-Axle	12*142mm Thru-Axle	12*142mm Thru-Axle	12*142mm Thru-Axle
Spoke	ProX CT3	ProX CT3	ProX CT3	ProX CT3	ProX CT3	ProX CT3	ProX CT3
Tire Size (Recommended)	700*30C-50C	700*30C-50C	700*30C-50C	700*30C-50C	700*30C-50C	700*30C-50C	700*30C-50C
Weight (+/-3%)	1074g	1114g	1134g	1184g	1244g	1284g	1454g



28mm Width Butterfly Weave

Compatible for 700*28C-45C tire (Tubeless Ready)

Bladed Carbon Spokes (ProX CS1) Only 2.9g/pc!

ProX C68DB Disc Hubs-Ceramic Bearings 36T Ratchet Freehub System






Freehub Body Options:
Shimano HG 11/12s
SRAM XDR
Shimano Micro Spline Road (MSR)
Campagnolo N3W

Precise Hand-built

Front 20/Rear 20 Spokes



ProX Butterfly Weave C68DB Ultra Light Full Carbon Spoke Disc Road Wheels

Model	C68DB-BRD28-33C-CS1	C68DB-BRD28-38C-CS1	C68DB-BRD28-45C-CS1	C68DB-BRD28-50C-CS1	C68DB-BRD28-55C-CS1
Rim Drawing					
Rim Depth	33mm	38mm	45mm	50mm	55mm
Rim Width	28mm Outer (21mm Inner)	28mm Outer (21mm Inner)	28mm Outer (21mm Inner)	28mm Outer (21mm Inner)	28mm Outer (21mm Inner)
Tire Type	Tubeless or Clincher	Tubeless or Clincher	Tubeless or Clincher	Tubeless or Clincher	Tubeless or Clincher
Hub	ProX C68DB	ProX C68DB	ProX C68DB	ProX C68DB	ProX C68DB
Front Size	12*100mm Thru-Axle	12*100mm Thru-Axle	12*100mm Thru-Axle	12*100mm Thru-Axle	12*100mm Thru-Axle
Rear Size	12*142mm Thru-Axle	12*142mm Thru-Axle	12*142mm Thru-Axle	12*142mm Thru-Axle	12*142mm Thru-Axle
Spoke	ProX CS1	ProX CS1	ProX CS1	ProX CS1	ProX CS1
Tire Size (Recommended)	700*28C-45C	700*28C-45C	700*28C-45C	700*28C-45C	700*28C-45C
Weight (+/-3%)	1186g	1216g	1256g	1296g	1306g

28mm Outer width

Undulating rim depth optional:
30-35mm
45-50mm
60-65mm

Finish optional:
Non-paint
Pearl white

Full carbon spoke width:
3.1mm
5.5mm






**ProX C67DB Disc Hubs-Ceramic Bearings
36T Ratchet Freehub System**

Freehub Body Options:
Shimano HG 11/12s
SRAM XDR
Shimano Micro Spline Road (MSR)

Precise Hand-built

Front 21/Rear 21 Spokes (2:1 ratio)

ProX Super Light C67DB Ratchet System Full Carbon Spoke Road Wheels (Undulating Rims)

Model	C67DB-NRD28-305-CS1 C67DB-NRD28-305-White-CS1	C67DB-NRD28-450-CS1 C67DB-NRD28-450-White-CS1	C67DB-NRD28-605-CS1 C67DB-NRD28-605-White-CS1
Rim Drawing			
Rim Depth	30-35mm	45-50mm	60-65mm
Rim Width	28mm Outer (21mm Inner)	28mm Outer (21mm Inner)	28mm Outer (21mm Inner)
Tire Type	Tubeless or Clincher	Tubeless or Clincher	Tubeless or Clincher
Hub	ProX C67DB	ProX C67DB	ProX C67DB
Front Size	12*100mm Thru-Axle	12*100mm Thru-Axle	12*100mm Thru-Axle
Rear Size	12*142mm Thru-Axle	12*142mm Thru-Axle	12*142mm Thru-Axle
Spoke	ProX CS1	ProX CS1	ProX CS1
Tire Size (Recommended)	700*28C-45C	700*28C-45C	700*28C-45C
Weight (+/-3%)	1175g/1265g	1295g/1385g	1420g/1520g

NEW



ProX C54DB Disc Hubs-Ceramic Bearings
54T Ratchet Freehub System

Freehub Body Options:
Shimano HG 11/12s
SRAM XDR
Shimano Micro Spline Road (MSR)

28mm Outer Width





Undulating rim depth optional:
40-45mm
45-50mm
55-60mm
60-65mm

Sapim CX-Ray Spokes
Super Aero & Light

Front 24/Rear 24 Spokes

Precise Hand-built

ProX Undulating Depth C54DB Carbon Road Wheels With Large Flange Hub For Racing

Model	C54DB-URD28-405SL-Ray	C54DB-URD28-450SL-Ray	C54DB-URD28-560SL-Ray	C54DB-URD28-605SL-Ray
Rim Drawing				
Rim Depth	40-45mm	45-50mm	55-60mm	60-65mm
Rim Width	28mm Outer (22mm Inner)	28mm Outer (22mm Inner)	28mm Outer (22mm Inner)	28mm Outer (22mm Inner)
Tire Type	Tubeless or Clincher	Tubeless or Clincher	Tubeless or Clincher	Tubeless or Clincher
Hub	ProX C54DB	ProX C54DB	ProX C54DB	ProX C54DB
Front Size	12*100mm Thru-Axle	12*100mm Thru-Axle	12*100mm Thru-Axle	12*100mm Thru-Axle
Rear Size	12*142mm Thru-Axle	12*142mm Thru-Axle	12*142mm Thru-Axle	12*142mm Thru-Axle
Spoke	Sapim CX-Ray	Sapim CX-Ray	Sapim CX-Ray	Sapim CX-Ray
Tire Size (Recommended)	700*28C-45C	700*28C-45C	700*28C-45C	700*28C-45C
Weight (+/-3%)	1328g	1358g	1478g	1508g

NEW

DT Swiss Hubs Optional

ProX C53DB Hubs Ceramic Bearings
54T Ratchet Freehub System

Freehub Body Options:
Shimano HG 11/12s
SRAM XDR
Shimano Micro Spline Road (MSR)
Campagnolo N3W

Compatible For 700*28C-45C Tire



28mm Outer Width Butterfly Weave

Sapim CX-Ray Spokes
Super Aero & Light

Front 24/Rear 24 Spokes

Tubeless Ready

ProX Butterfly Weave C53DB Carbon Road Wheels High Performance Ratchet Freehub

Model	C53DB-BRD28-33C-Ray	C53DB-BRD28-38C-Ray	C53DB-BRD28-45C-Ray	C53DB-BRD28-50C-Ray	C53DB-BRD28-55C-Ray
Rim Drawing					
Rim Depth	33mm	38mm	45mm	50mm	55mm
Rim Width	28mm Outer (21mm Inner)	28mm Outer (21mm Inner)	28mm Outer (21mm Inner)	28mm Outer (21mm Inner)	28mm Outer (21mm Inner)
Tire Type	Tubeless or Clincher	Tubeless or Clincher	Tubeless or Clincher	Tubeless or Clincher	Tubeless or Clincher
Hub	ProX C53DB	ProX C53DB	ProX C53DB	ProX C53DB	ProX C53DB
Front Size	12*100mm Thru-Axle	12*100mm Thru-Axle	12*100mm Thru-Axle	12*100mm Thru-Axle	12*100mm Thru-Axle
Rear Size	12*142mm Thru-Axle	12*142mm Thru-Axle	12*142mm Thru-Axle	12*142mm Thru-Axle	12*142mm Thru-Axle
Spoke	Sapim CX-Ray	Sapim CX-Ray	Sapim CX-Ray	Sapim CX-Ray	Sapim CX-Ray
Tire Size (Recommended)	700*28C-45C	700*28C-45C	700*28C-45C	700*28C-45C	700*28C-45C
Weight (+/-3%)	1302g	1332g	1372g	1412g	1422g

26mm Inner Width For CX/Gravel

Pillar 1423 Spokes, Aero & Strong

Front 24/Rear 24 Spokes

DT Swiss Hubs Optional

ProX C52DB Disc Hubs-Ceramic Bearings
36T Ratchet Freehub System

Freehub Body Options:
Shimano HG 11/12s
SRAM XDR
Shimano Micro Spline Road (MSR)
Campagnolo N3W

Compatible for 700*35C-50C tire
(tubeless ready)



ProX 26mm Inner Width Mid-range C52DB Disc Brake 700C Gravel Carbon Wheels

Model	C52DB-PXG26-40C-1423	C52DB-PXG26-45C-1423	C52DB-PXG26-50C-1423
Rim Drawing			
Rim Depth	40mm	45mm	50mm
Rim Width	32mm Outer (26mm Inner)	32mm Outer (26mm Inner)	32mm Outer (26mm Inner)
Tire Type	Tubeless or Clincher	Tubeless or Clincher	Tubeless or Clincher
Hub	ProX C52DB	ProX C52DB	ProX C52DB
Front Size	12*100mm Thru-Axle	12*100mm Thru-Axle	12*100mm Thru-Axle
Rear Size	12*142mm Thru-Axle	12*142mm Thru-Axle	12*142mm Thru-Axle
Spoke	Pillar 1423	Pillar 1423	Pillar 1423
Tire Size (Recommended)	700*35C-50C	700*35C-50C	700*35C-50C
Weight (+/-3%)	1500g	1540g	1580g

NEW

Compatible For 700*35C-50C Tire

Bladed Carbon Spokes (ProX CS1)
Only 2.9g/pc!

Precise Wheels Handbuilt



G71DB Disc Brake Hubs- Steel Bearings
36T Ratchet Freehub System

Freehub Body Options:
Shimano HG 11/12s
SRAM XDR
Shimano Micro Spline Road (MSR)

26mm Inner Width/31.5mm Outer Width

Front 24/Rear 24 Spokes

ProX Super Light G71DB Gravel Wheels Full Carbon Spoke Gravel Bike Wheels


Model	G71DB-PXG26-40C-CS1	G71DB-PXG26-45C-CS1	G71DB-PXG26-50C-CS1
Rim Drawing			
Rim Depth	40mm	45mm	50mm
Rim Width	31.5mm Outer (26mm Inner)	31.5mm Outer (26mm Inner)	31.5mm Outer (26mm Inner)
Tire Type	Tubeless or Clincher	Tubeless or Clincher	Tubeless or Clincher
Hub	ProX G71DB	ProX G71DB	ProX G71DB
Front Size	12*100mm Thru-Axle	12*100mm Thru-Axle	12*100mm Thru-Axle
Rear Size	12*142mm Thru-Axle	12*142mm Thru-Axle	12*142mm Thru-Axle
Spoke	ProX CS1	ProX CS1	ProX CS1
Tire Size (Recommended)	700*35C-50C	700*35C-50C	700*35C-50C
Weight (+/-3%)	1292g	1332g	1372g



Bead Hook and Hookless rims optional

Pillar 1423 spokes, Aero&strong

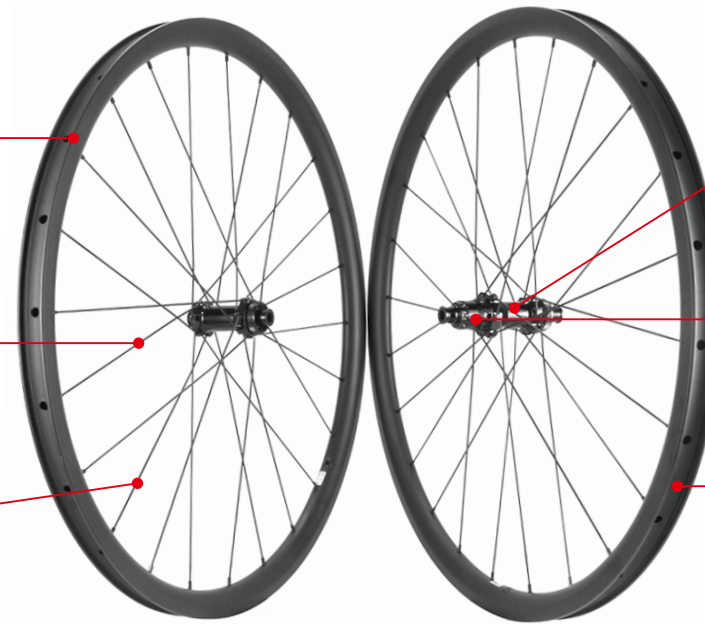Front 24/Rear 24 Spokes



ProX 98DB Economical Disc Brake Hubs

6-Pawl Freehub System
Shimano 11/12s or SRAM 12s XDR Optional

Compatible for 700*30C-50C tire (tubeless ready)

ProX Affordable 98DB Disc Brake 700C Gravel Carbon Wheels

Model	98DB-PCX33-1423	98DB-PZX33-1423	98DB-PCX44-1423	98DB-PZX44-1423
Rim Drawing				
Rim Depth	33mm	33mm	44mm	44mm
Rim Width	28mm Outer (21mm Inner)	28mm Outer (23mm Inner)	28mm Outer (21mm Inner)	28mm Outer (23mm Inner)
Tire Type	Tubeless or Clincher	Tubeless or Clincher	Tubeless or Clincher	Tubeless or Clincher
Hub	ProX 98DB	ProX 98DB	ProX 98DB	ProX 98DB Disc
Front Size	12*100mm Thru-Axle	12*100mm Thru-Axle	12*100mm Thru-Axle	12*100mm Thru-Axle
Rear Size	12*142mm Thru-Axle	12*142mm Thru-Axle	12*142mm Thru-Axle	12*142mm Thru-Axle
Spoke	Pillar 1423	Pillar 1423	Pillar 1423	Pillar 1423
Tire Size (Recommended)	700*30C-50C	700*30C-50C	700*30C-50C	700*30C-50C
Weight (+/-3%)	1487g	1487g	1547g	1547g

NEW

32er (BSD: 686mm)

89MB Light Weight MTB Carbon Wheels

Front 28/Rear 28 Spokes

Tubeless Ready

**89MB Disc Brake Hubs - Steel Bearings
Ratchet 54T Freehub System**

**Freehub Body Options:
Shimano 11s HG
Shimano 12s MicroSpline
Sram 12s XD**

Sapim Leader Spokes, Strong and Durable

ProX New 32 Inch 89MB Wheels Carbon MTB Wheels Ratchet 54T For XC/AM

Model	89MB-AD32-36-Leader	89MB-AD32-36SL-Leader
Rim Drawing		
Rim Offset	2.8mm	2.8mm
Rim Width	35.8mm Outer (30mm Inner)	35.8mm Outer (30mm Inner)
Tire Type	Tubeless or Clincher	Tubeless or Clincher
Hub	ProX 89MB	ProX 89MB
Front Size	15*110mm Boost	15*110mm Boost
Rear Size	12*148mm Boost	12*148mm Boost
Spoke	Sapim Leader	Sapim Leader
Tire Size (Recommended)	32*2.3"-2.8"	32*2.3"-2.8"
Weight (+/-3%)	1814g	1734g

89MB Light Weight MTB Carbon Wheels

Front 28/Rear 28 Spokes

Tubeless Ready

DT Swiss Hubs Optional

89MB Disc Brake Hubs - Steel Bearings
Ratchet 54T Freehub System

Freehub Body Options:
Shimano 11s HG
Shimano 12s MicroSpline
Sram 12s XD

Pillar 1423 Spokes, Strong and Stiff



ProX Light Weight 89MB Wheels Carbon MTB Wheels Ratchet 54T Mountain Bike Wheels

Model	89MB-PAD930-1423	89MB-PAD930GP-1423	89MB-PAD933-1423	89MB-PAD933GP-1423	89MB-PAD938-AM-1423	89MB-PAD940-1423
Rim Drawing						
Rim Offset	2.6mm	2.6mm	3mm	3mm	3mm	3.5mm
Rim Width	30mm Outer (25mm Inner)	30mm Outer (25mm Inner)	33mm Outer (26mm Inner)	33mm Outer (26mm Inner)	38mm Outer (32mm Inner)	40mm Outer (34mm Inner)
Tire Type	Tubeless or Clincher	Tubeless or Clincher	Tubeless or Clincher	Tubeless or Clincher	Tubeless or Clincher	Tubeless or Clincher
Hub	ProX 89MB	ProX 89MB	ProX 89MB	ProX 89MB	ProX 89MB	ProX 89MB
Front Size	15*110mm Boost	15*110mm Boost	15*110mm Boost	15*110mm Boost	15*110mm Boost	15*110mm Boost
Rear Size	12*148mm Boost	12*148mm Boost	12*148mm Boost	12*148mm Boost	12*148mm Boost	12*148mm Boost
Spoke	Pillar 1423	Pillar 1423	Pillar 1423	Pillar 1423	Pillar 1423	Pillar 1423
Tire Size (Recommended)	29*2.0"-2.4"	29*2.0"-2.4"	29*2.1"-2.5"	29*2.1"-2.5"	29*2.3"-2.8"	29*2.35"-3.0"
Weight (+/-3%)	1472g	1372g	1512g	1432g	1652g	1732g

88MB Disc Brake Hubs - Steel Bearings
Ratchet 36T Freehub System

Freehub Body Options:
Shimano 11s HG
Shimano 12s MicroSpline
Sram 12s XD

Tubeless Ready



DT Swiss Hubs Optional
XC/TR/AM/EN rims optional

Pillar 1423 spokes, strong&stiff

Front 28/Rear 28 Spokes


ProX 88MB Wheels Carbon MTB Wheels Ratchet 36T Mountain Bike Wheels

Model	88MB-PAD930-1423	88MB-PAD930GP-1423	88MB-PAD933-1423	88MB-PAD933GP-1423	88MB-PAD938-AM-1423	88MB-PAD940-1423
Rim Drawing						
Rim Offset	2.6mm	2.6mm	3mm	3mm	3mm	3.5mm
Rim Width	30mm Outer (25mm Inner)	30mm Outer (25mm Inner)	33mm Outer (26mm Inner)	33mm Outer (26mm Inner)	38mm Outer (32mm Inner)	40mm Outer (34mm Inner)
Tire Type	Tubeless or Clincher	Tubeless or Clincher	Tubeless or Clincher	Tubeless or Clincher	Tubeless or Clincher	Tubeless or Clincher
Hub	ProX 88MB	ProX 88MB	ProX 88MB	ProX 88MB	ProX 88MB	ProX 88MB
Front Size	15*110mm Boost	15*110mm Boost	15*110mm Boost	15*110mm Boost	15*110mm Boost	15*110mm Boost
Rear Size	12*148mm Boost	12*148mm Boost	12*148mm Boost	12*148mm Boost	12*148mm Boost	12*148mm Boost
Spoke	Pillar 1423	Pillar 1423	Pillar 1423	Pillar 1423	Pillar 1423	Pillar 1423
Tire Size (Recommended)	29*2.0"-2.4"	29*2.0"-2.4"	29*2.1"-2.5"	29*2.1"-2.5"	29*2.3"-2.8"	29*2.35"-3.0"
Weight (+/-3%)	1515g	1415g	1555g	1475g	1695g	1775g



ProX 3-Spoke Carbon Wheels For Road/TT/Track Bikes

Model	P3-705	P3-758	P3-120C
Rim Drawing			
Rim Depth	70-75mm	75-80mm	120mm
Rim Width	28mm Outer (21mm Inner)	28mm Outer (22.5mm Inner)	28mm Outer (22.5mm Inner)
Tire Type	Tubeless or Clincher	Tubeless or Clincher	Tubeless or Clincher
Hub	ProX 36DB	ProX 36DB	ProX 36DB
Front Size	12*100mm Thru-Axle	12*100mm Thru-Axle	12*100mm Thru-Axle
Rear Size	12*142mm Thru-Axle	12*142mm Thru-Axle	12*142mm Thru-Axle
Spoke	3-Spoke Carbon	3-Spoke Carbon	3-Spoke Carbon
Tire Size (Recommended)	700*28C-45C	700*28C-45C	700*28C-45C
Weight (+/-3%)	F:950g R:1050g	F:950g R:1050g	F:950g R:1050g

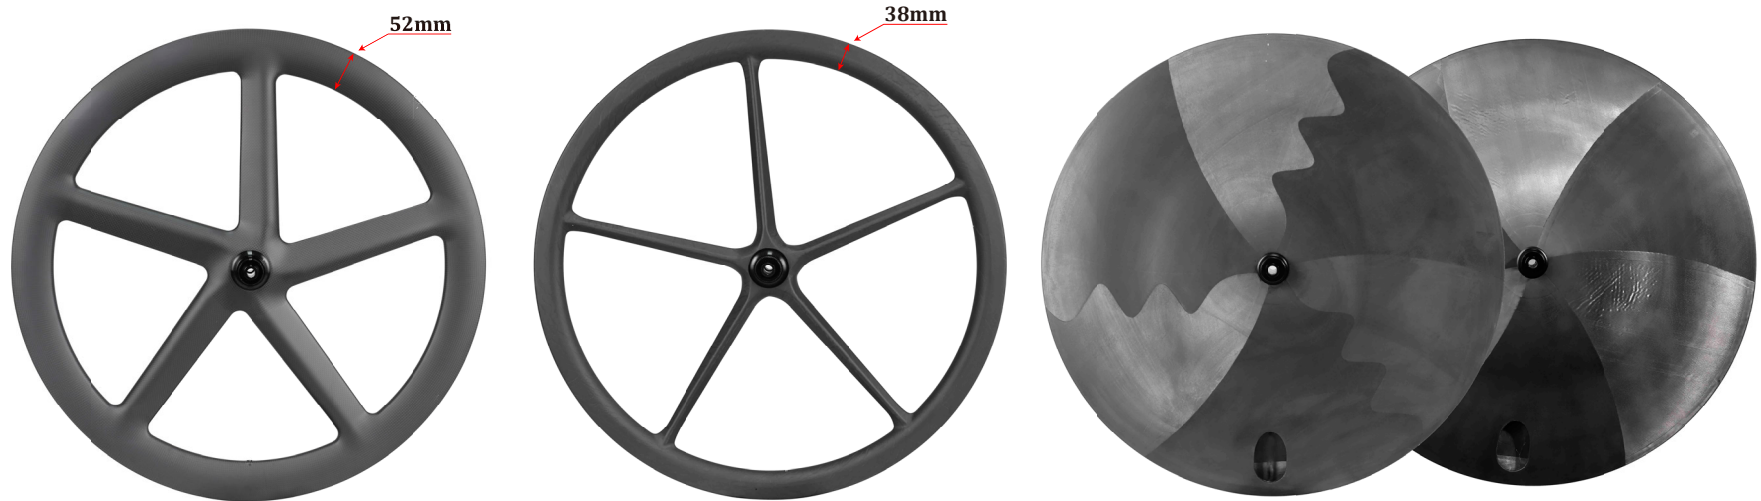

ProX 5-Spoke Carbon Wheels and Full Disk Rear Wheel

Model	P5-52C DB	P5-38C DB	UFO27-DISC
Rim Drawing			
Rim Depth	52mm	38mm	N/A
Rim Width	25mm Outer (18mm Inner)	28mm Outer (21.6mm Inner)	27mm Outer (21mm Inner)
Tire Type	Tubeless or Clincher	Tubeless or Clincher	Tubeless or Clincher
Hub	ProX 36DB	ProX 36DB	ProX 36DB
Front Size	12*100mm Thru-Axle	12*100mm Thru-Axle	N/A
Rear Size	12*142mm Thru-Axle	12*142mm Thru-Axle	12*142mm Thru-Axle
Spoke	5-Spoke Carbon	5-Spoke Carbon	Full Disk
Tire Size (Recommended)	700*25C-40C	700*28C-50C	700*28C-45C
Weight (+/-3%)	F:850g R:950g	F:625g R:725g	970g



23.5mm Inner Width

Tubeless Ready

Premium Carbon Fiber
Super Light: T700+T800
Ultra Light: T800+T1000





Wide Aero U Shape Design

2-year Warranty

35/45/50/55/60/65/85 Depth Optional


ProX 30mm Wide Aero Disc Brake 700C Carbon Clincher Rims 23.5mm Inner Width

Model	RD923-35SL RD923-35UL	RD923-45SL RD923-45UL	RD923-50SL RD923-50UL	RD923-55SL RD923-55UL	RD923-60SL RD923-60UL	RD923-65SL RD923-65UL	RD923-85SL RD923-85UL
Sectional Drawing							
Rim Depth	35mm	45mm	50mm	55mm	60mm	65mm	85mm
Rim Width	30mm Outer (23.5mm Inner)	30mm Outer (23.5mm Inner)	30mm Outer (23.5mm Inner)	30mm Outer (23.5mm Inner)	30mm Outer (23.5mm Inner)	30mm Outer (23.5mm Inner)	30mm Outer (23.5mm Inner)
Weight(±15g)	SL: 400g UL: 350g	SL: 420g UL: 370g	SL: 430g UL: 380g	SL: 440g UL: 405g	SL: 450g UL: 435g	SL: 490g UL: 455g	SL: 630g UL: 540g
Terrain (Recommended)	Road	Road	Road	Road	Road	Road	Road
ERD	569mm	549mm	539mm	529mm	519mm	509mm	469mm
Material	Super Light: T700+T800 Ultra Light: T800+T1000	Super Light: T700+T800 Ultra Light: T800+T1000	Super Light: T700+T800 Ultra Light: T800+T1000	Super Light: T700+T800 Ultra Light: T800+T1000	Super Light: T700+T800 Ultra Light: T800+T1000	Super Light: T700+T800 Ultra Light: T800+T1000	Super Light: T700+T800 Ultra Light: T800+T1000
Max Weight Limit	115kg/253lb	120kg/265lb	120kg/265lb	120kg/265lb	125kg/275lb	125kg/275lb	125kg/275lb
Max Spoke Tension	130kgf	130kgf	130kgf	130kgf	130kgf	130kgf	130kgf
Max Tire Pressure	125psi/8.6bar	125psi/8.6bar	125psi/8.6bar	125psi/8.6bar	125psi/8.6bar	125psi/8.6bar	125psi/8.6bar
Tire Size (Recommended)	700*30C-50C	700*30C-50C	700*30C-50C	700*30C-50C	700*30C-50C	700*30C-50C	700*30C-50C

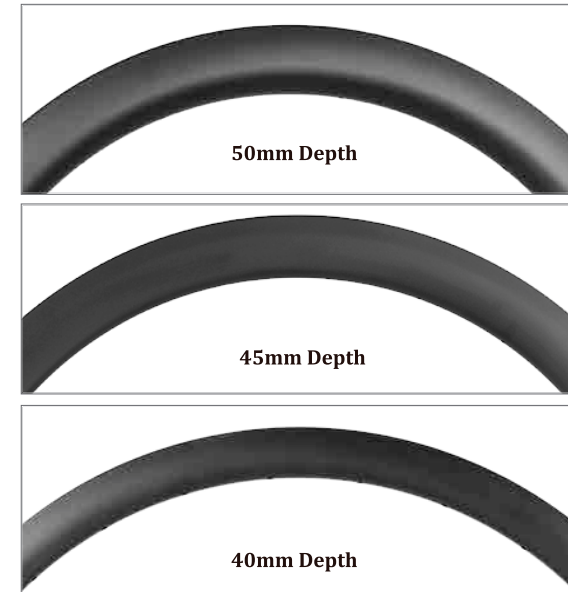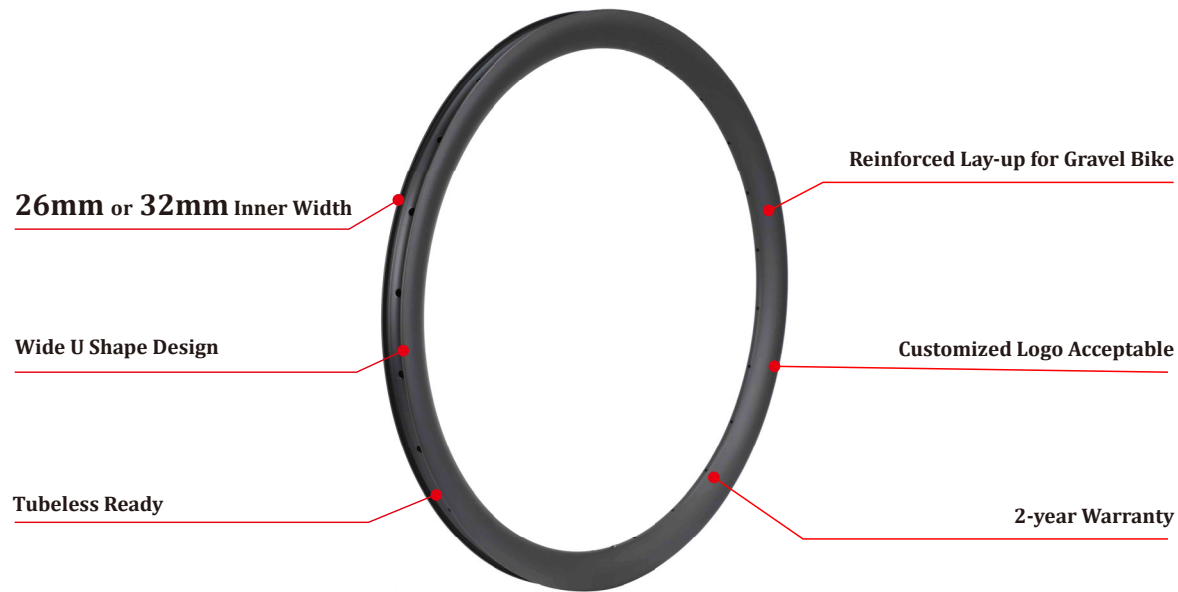

ProX Carbon Gravel Rims Widened 26mm/32mm Inner Width 700C Gravel Bike Rims

Model	PXG26-40C	PXG26-45C	PXG26-50C	PXG32-40C	PXG32-45C	PXG32-50C
Sectional Drawing						
Rim Depth	40mm	45mm	50mm	40mm	45mm	50mm
Rim Width	31.5mm Outer (26mm Inner)	31.5mm Outer (26mm Inner)	31.5mm Outer (26mm Inner)	37.5mm Outer (32mm Inner)	37.5mm Outer (32mm Inner)	37.5mm Outer (32mm Inner)
Weight(±15g)	410g	430g	450g	430g	440g	460g
Terrain (Recommended)	CX/Gravel	CX/Gravel	CX/Gravel	CX/Gravel	CX/Gravel	CX/Gravel
ERD	560mm	550mm	540mm	560mm	550mm	540mm
Material	T700	T700	T700	T700	T700	T700
Max Weight Limit	120kg/265lb	120kg/265lb	120kg/265lb	120kg/265lb	120kg/265lb	120kg/265lb
Max Spoke Tension	130kgf	130kgf	130kgf	130kgf	130kgf	130kgf
Max Tire Pressure	90psi/6.2bar	90psi/6.2bar	90psi/6.2bar	90psi/6.2bar	90psi/6.2bar	90psi/6.2bar
Tire Size (Recommended)	700*35C-50C	700*35C-50C	700*35C-50C	700*44C-70C	700*44C-70C	700*44C-70C

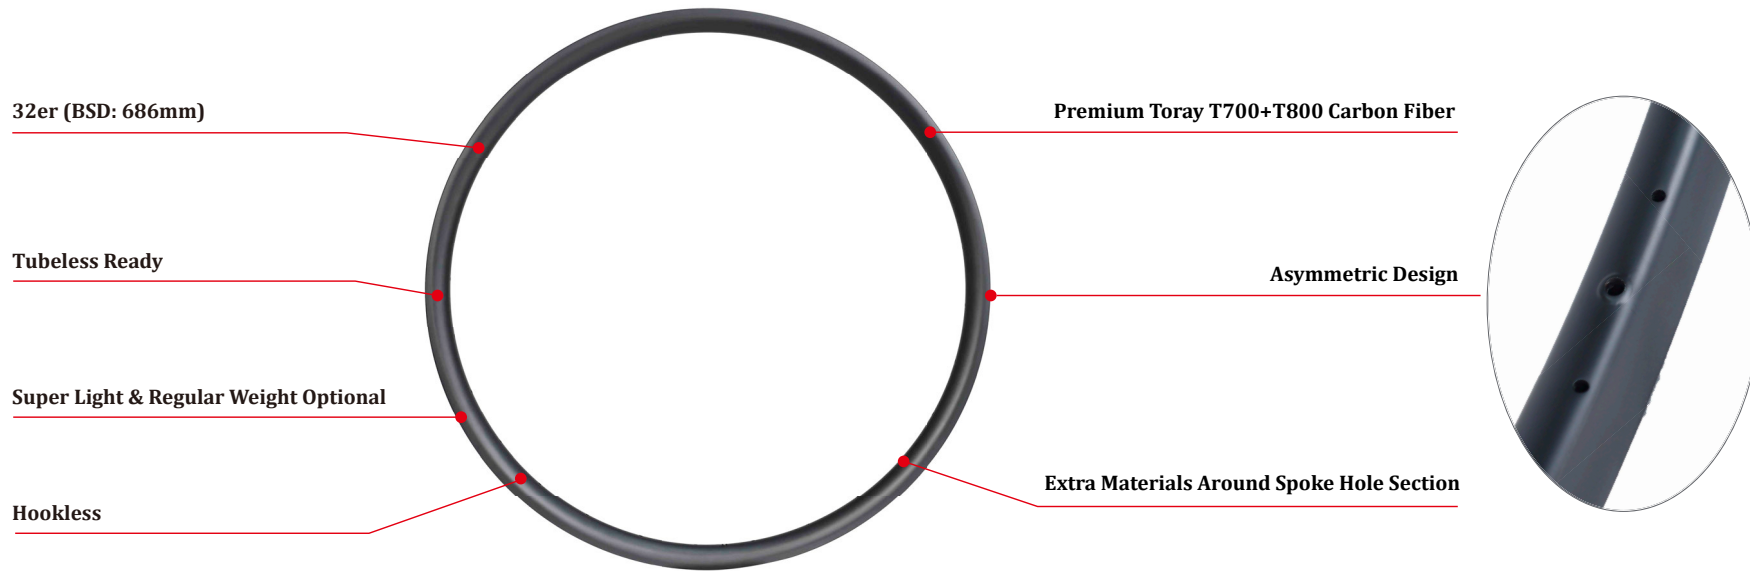

ProX 32er MTB Carbon Rims 32inch Mountain Bike Carbon Rims For XC/AM

Model	AD32-36SL	AD32-36
Sectional Drawing		
Rim Depth	2.8mm	2.8mm
Rim Width	35.8mm Outer (30mm Inner)	35.8mm Outer (30mm Inner)
Weight(±15g)	460g	500g
Terrain (Recommended)	Cross Country and All Mountain	Cross Country and All Mountain
ERD	646mm	646mm
Material	T700+T800	T700
Max Weight Limit	100kg/220lb	120kg/265lb
Max Spoke Tension	145kgf	145kgf
Max Tire Pressure	40psi/2.7bar	40psi/2.7bar
Tire Size (Recommended)	32*2.3"-2.8"	32*2.3"-2.8"